

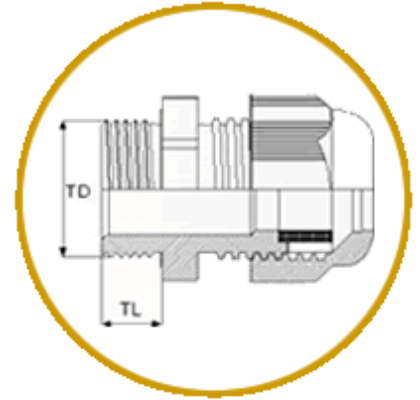
Metric Thread Cable Glands








Water tight, easy assemble, good strain relief, wide clamping range, multipurpose applications, easy handling



Material
Protection class
Temp. range
Oper. temperature
Seal

Polyamide 6
IP 68, 5 bar
-30°C to +80°C permanent
Up to +150°C intermittent
Neoprene



Type	M12x1,5	M16x1,5	M16x1,5	M20x1,5	M20x1,5	M20x1,5	M20x1,5	M25x1,5	M25x1,5	M32x1,5	M40x1,5	M50x1,5	M63x1,5
 Code	BM-0S	BM-01	BM-01L	BM-02	BM-02L	BM-03	BM-04	BM-05	BM-06	BM-07	BM-08	BM-09	BM-10
 Code	BM-1S	BM-11	BM-11L	BM-12	BM-12L	BM-13	BM-14	BM-15	BM-16	BM-17	BM-18	BM-19	BM-20
 Code	BM-2S	BM-21	BM-21L	BM-22	BM-22L	BM-23	BM-24	BM-25	BM-26	BM-27	BM-28	BM-29	BM-30
 Code	BM-3S	BM-31	BM-31L	BM-32	BM-32L	BM-33	BM-34	BM-35	BM-36	BM-37	BM-38	BM-39	BM-40
 Code	BM-4S	BM-41	BM-41L	BM-42	BM-42L	BM-43	BM-44	BM-45	BM-46	BM-47	BM-48	BM-49	BM-50
 Code	BM-5S	BM-51	BM-51L	BM-52	BM-52L	BM-53	BM-54	BM-55	BM-56	BM-57	BM-58	BM-59	BM-60
TD mm	12	16	16	20	20	20	20	25	25	32	40	50	63
TL mm	8	10	15	10	15	10	15	10	15	18	18	18	18
 mm	15	22	22	24	24	27	27	33	33	42	53	60	65
Clamping Range mm	3,0	5,0	5,0	6,0	6,0	10,0	10,0	13,0	13,0	16,0	22,0	30,0	34,0
	6,5	10,0	10,0	12,0	12,0	14,0	14,0	18,0	18,0	25,0	32,0	38,0	44,0