

## Product Info


Lock nuts, flanged

**Lock Nuts Flanged, Polyamide**

M20x1,5 /SW=26mm

BML-12 , BML-02 , BML-22

- For standard industrial applications.
- Safe fastening of cable glands.
- Flanged design offers safe sealing.

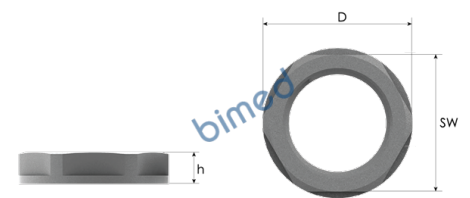

Images might not be representative of the actual colour, size or shape of the product listed

## Technical Details

|                            |  |                     |
|----------------------------|--|---------------------|
| Material                   | PA 6 GF 30 (Polyamide 6, 30% Glass Fiber Reinforced) |                     |
| Flammability               | HB according to UL94                                 |                     |
| Operating Temperature      | <b>Permanent</b>                                     | <b>Intermittent</b> |
|                            | -20 °C to +100 °C                                    | -30 °C to +150 °C   |
| Thread Type                | Metric EN 60423                                      |                     |
|                            | NPT ANSI B1.20.1                                     |                     |
|                            | PG DIN 40430   |                     |
|                            | Gas ISO 228  |                     |
| Inner Thread Size (Female) | M20x1,5  |                     |
| Spanner Width              | 26 mm  |                     |
| Outer (D)                  | 28,6 mm  |                     |
| Height (h)                 | 6,0 mm   |                     |
| Part Number                | RAL 7035 light grey                                  | BML-12              |
|                            | RAL 7001 grey  | BML-02              |
|                            | RAL 9005 black                                       | BML-22              |